

ADV NETWORK

ADV 4 Ports Outdoor Fiber Termination Box



■ Description:

The product is used in the end termination of residential building and villas, to fix and splice with pigtails. It can be installed on the wall, and adapt variety of optical connection styles. It's made of high quality ABS plastic. Reasonable design for fiber arrangement, bend radius more than 30mm. Suitable for 1pc 4 way splitter or 1pc 8 way splitter with LC connector (Steel tube type).

■ Main Parameters:

Operate temperature: $-20^{\circ}\text{C} + 60^{\circ}\text{C}$

Relative humidity: $\leq 90\% (+30^{\circ}\text{C})$




Atmospheric pressure: 70Kpa-106Kpa

Storage Temperature: $-20^{\circ}\text{C} + 80^{\circ}\text{C}$


Optical parameter: Insertion loss $\leq 0.3\text{dB}$; Excess loss: $\leq 0.2\text{dB}$; Return loss $\geq 50\text{dB}$

■ Dimension and Pole mounted using drawings

212(H)mm \times 142(W)mm \times 40(D)mm

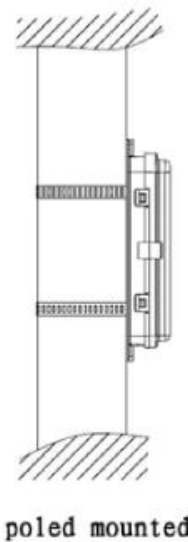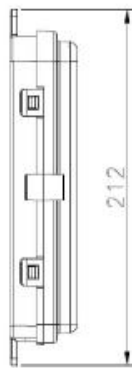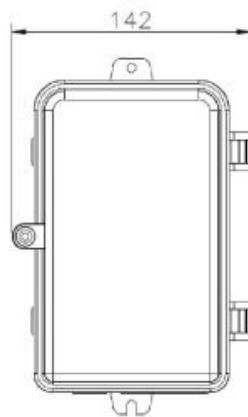

■ **Fiber arranging drawings:**

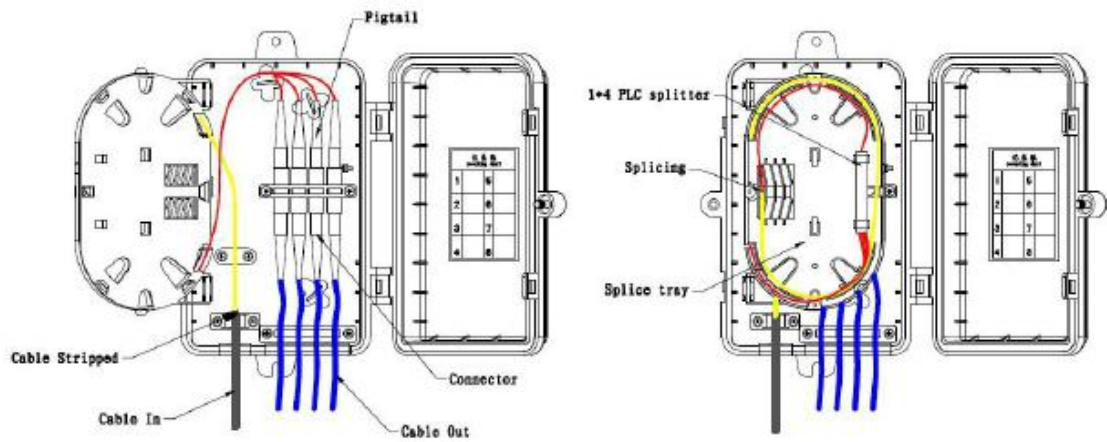

■ **Accessories:**

Item	Description	Part no.	Unit	Qty	Remark
1	Fiber optic terminal box	OTB-C04-A	set	1	Wall mounted accessory is standard. Pole mounted accessory is optional.
2	PLC Splitter	PLC-1X4SC or PLC-1X8LC	set	1	Optional
3	Fiber optic adapter	SC simplex	set	4	Optional
4	Pole mounted		set	1	Optional