

## **DS-K1T323EBFWX-E1**

### **Value Series Face Access Terminal**



- 2.4-inch display screen, 2 Mega pixel wide-angle lens
- 1,000 face capacity, 3000 card capacity, and 3000 fingerprint capacity
- Face recognition duration < 0.2 s/User
- Supports face, card, and fingerprint authentication
- Two-way audio with client software, indoor station, and main station.
- Supports AP mode. Supports mobile Web and PC Web for configuration
- Supports powered by 12 VDC or PoE and supports powering for device and door lock
- Supports EM card
- Supports WDR

## ▪ Specification


System	
Operating system	Linux
Display	
Screen size	2.4-inch
Resolution	240 × 320
Type	TFT
Operation method	Non touchable
Video	
Lens	×1
Video standard	PAL (Default) and NTSC
Network	
Bluetooth	Support
Wired network	10/100 Mbps self adaptive
Wi-Fi	Support
Interface	
PoE	IEEE802.3at, standard PoE
Network interface	1
Wiegand	1, supports Wiegand input, single direction
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
Capacity	
User capacity	1000
Card capacity	3000
Face capacity	1000
Fingerprint capacity	3000
Event capacity	150000
Authentication	
Card type	EM card
Card reading frequency	125 KHz
Face recognition duration	< 0.33 s
Face recognition accuracy rate	> 99%
Face recognition distance	0.3 to 1.5 m
General	
Button	No physical call button
Power supply	12 VDC, 1 A, standard PoE
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	10 to 90% (No condensing)
Dimensions	165.2 mm × 75.7 mm × 25 mm ( 6.5" × 2.98" × 0.98")
Installation	Wall mounting
Protective level	IP65

Weight	Gross weight: 0.61kg (1.34 lbs) Net weight: 0.22 kg (0.49 lbs)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Turkish, French, Traditional Chinese
<b>Function</b>	
QR code recognition	Support scan QR code via camera
Face anti-spoofing	Support
Two-way audio	Support
Audio prompt	Support
Time synchronization	Support

## ▪ Available Model

DS-K1T323EBFWX-E1

## ▪ Dimension

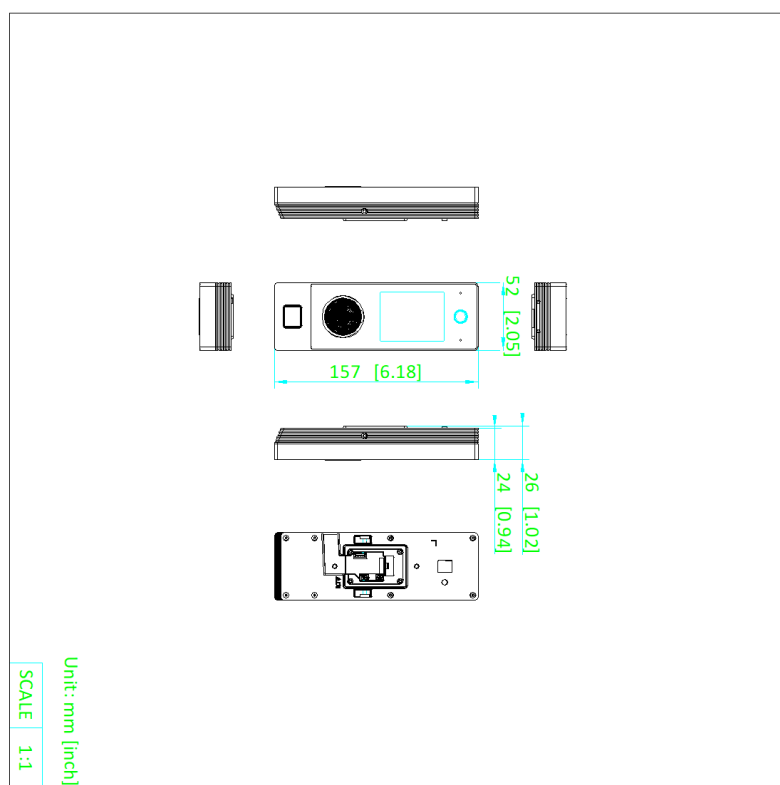

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

