

DS-K1T323MBWX-E1

Value Series Face Access Terminal



- 2.4-inch display screen, 2 Mega pixel wide-angle lens
- 1,000 face capacity, and 3000 card capacity
- Face recognition duration < 0.2 s/User
- Supports face and card authentication
- Two-way audio with client software, indoor station, and main station
- Supports AP mode. Supports mobile Web and PC Web for configuration
- Supports powered by 12 VDC or PoE and supports powering for device and door lock.
- Supports M1 card
- Supports WDR

▪ Specification


| System | |
|--------------------------------|---|
| Operating system | Linux |
| Display | |
| Screen size | 2.4-inch |
| Resolution | 240 × 320 |
| Type | TFT |
| Operation method | Non touchable |
| Video | |
| Lens | ×1 |
| Video standard | PAL (Default) and NTSC |
| Network | |
| Bluetooth | Support |
| Wired network | 10/100 Mbps self adaptive |
| Wi-Fi | Support |
| Interface | |
| PoE | IEEE802.3at, standard PoE |
| Network interface | 1 |
| Wiegand | 1, supports Wiegand input, single direction |
| Lock control | 1 |
| Exit button | 1 |
| Door contact input | 1 |
| TAMPER | 1 |
| Capacity | |
| User capacity | 1000 |
| Card capacity | 3000 |
| Face capacity | 1000 |
| Event capacity | 150000 |
| Authentication | |
| Card type | M1 card,M1 card content,CPU card No. |
| Card reading frequency | 13.56 MHz |
| Face recognition duration | < 0.33 s |
| Face recognition accuracy rate | > 99% |
| Face recognition distance | 0.3 to 1.5 m |
| General | |
| Button | 1 physical call button |
| Power supply | 12 VDC, 1 A, standard PoE |
| Working temperature | -30 °C to 60 °C (-22 °F to 140 °F) |
| Working humidity | 10 to 90% (No condensing) |
| Dimensions | 165.2 mm × 75.7 mm × 25 mm (6.5" × 2.98" × 0.98") |
| Installation | Wall mounting |
| Protective level | IP65 |
| Weight | Net weight: 0.19 kg (0.42 lb) Rough weight: 0.59 kg (1.3 lb) |

| | |
|---------------------|--|
| Language | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Turkish, French, Traditional Chinese |
| Function | |
| QR code recognition | Support scan QR code via camera |
| Face anti-spoofing | Support |
| Two-way audio | Support |

▪ Available Model

DS-K1T323MBWX-E1

▪ Dimension

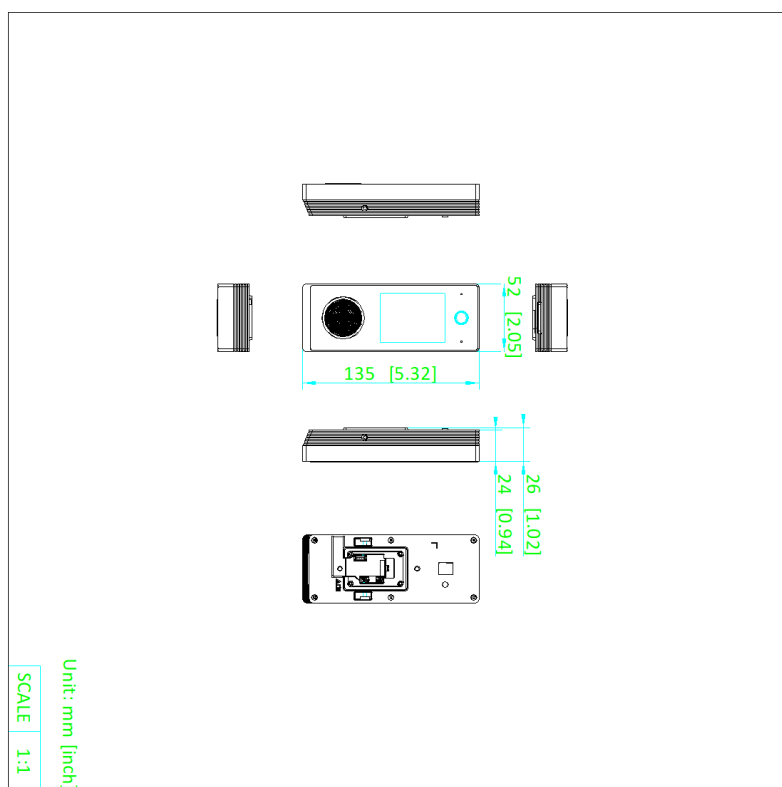

See Far, Go Further



www.hikvision.com
support@hikvision.com

