

**DS-QAZ0206G1-S**  
**Ceiling Secondary Speaker 6 W**



- Connecting the main speaker for amplification.


## ▪ Specification

Speaker	
Rated Power	6 W
Impedance	8 Ω
Max. Acoustic Pressure	100 dB SPL
Sensitivity(1 m, 1 W)	93 dB
Direction	All directions
Frequency Response	300 Hz to 15 kHz
SNR	82 dB
Interface	
Audio In	Fixed resistance input × 1, 8 Ω
General	
Operating Temperature	10 °C to 50 °C
Material	Device body: plastic; Mesh cover: metal
Dimension	∅179 mm × 77.5 mm (∅7.05" × 3.05") (Hole Size: 160 mm)
Package Dimension	255 mm × 243 mm × 175 mm (10.04" × 9.57" × 6.89")
Weight	Approx. 0.3 kg (0.66 lb.)
With Package Weight	Approx. 0.45 kg (0.99 lb.)
Color	White
Packing List	Device × 1 Mesh cover × 1 Regulatory Compliance and Safety Information × 1
Operating Humidity	< 90% (No condensation)

## ▪ Available Model

DS-QAZ0206G1-S

## ▪ Dimension

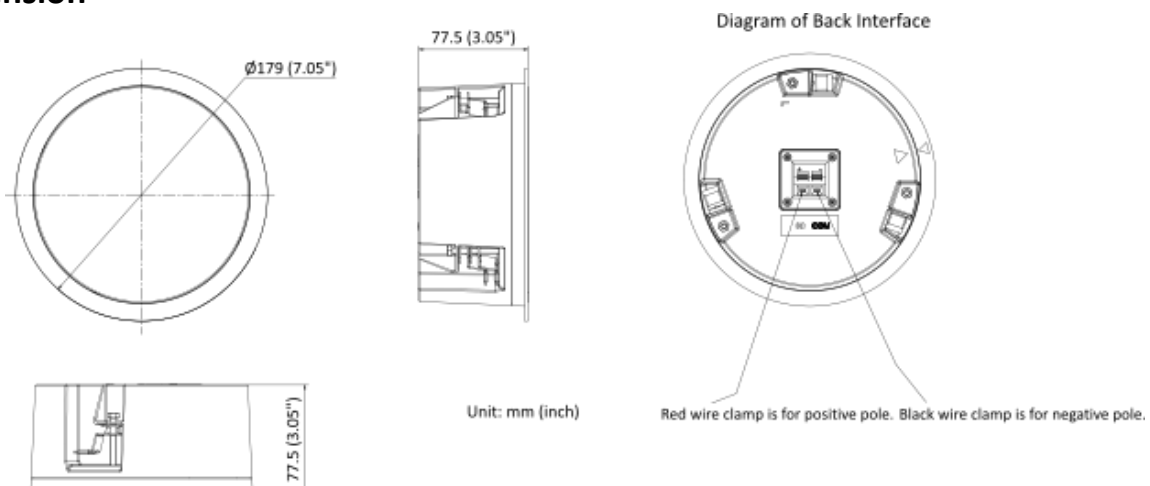



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

