

DS-TME200-D Entrance & Exit Controller



- Supports Entrance & Exit management of 4 lanes.
- TCP/IP network communication, with self-adaptive network interface. The communication data is encrypted to ensure information security.
- Supports 4 Wiegand interface for accessing card reader. Wiegand interface supports W26/ W34 and is seamlessly compatible with third-party card reader.
- Massive storage with 50, 000 cards information and 50,000 card swiping records. Supports various card types such as normal/blocklist/Registered
- Supports 4 alarm output interface for controlling up to 4 barrier gates.
- Supports online and offline operating mode.
- Supports time synchronization via NTP, manual or automatic method

▪ Specification

Network	
Interface Protocol	TCP/IP
Interface	
Relay Output	4
Alarm Input	4
Wiegand	4*W26/34
RS-232	1
RS-485	1
USB	1*USB2.0
Network	1*10M/100M self-adaption
General	
Working Temperature and Humidity	-20°C ~ 50°C 10% ~ 95%
Power Supply	12V DC
Power Consumption	20 W (5 W without load)
Dimensions	179 × 90 × 42 mm (7.04 × 3.54 × 1.65 inch)
Weight	0.5 kg (1.10 lb.)
Weight (with Package)	1 kg (2.20 lb.)
Dimensions (with Package)	352 x 236 x 88 mm (13.86 × 9.29 × 3.46 inch)
Operating System	Embedded Linux System


▪ Available Model

DS-TME200-D

DS-TME200-D/P

DS-TME200-D(O-STD)

▪ Dimension

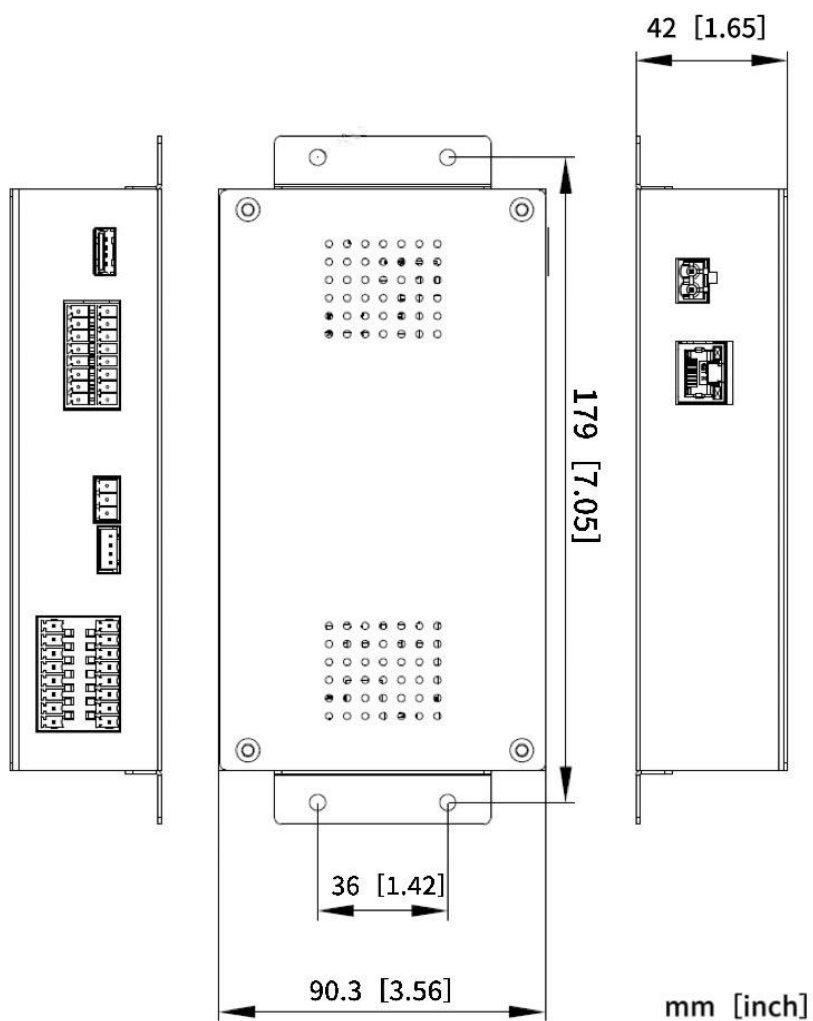

See Far, Go Further



www.hikvision.com
support@hikvision.com

