

**DS-TRC902-1/A(dual-band)
UHF White Card (dual-band)**



- It is suitable for scenarios such as pallet management, logistics management, asset entrance and exit management, and product management.


▪ Specification

UHF	
Working Frequency	CN&US (902-928)Mhz; 13.56Mhz
RF Protocol	EPC Class 1 Gen 2 ISO18000-6C; ISO14443A
Reading Distance	Fixed Reader [PERP=2W]: 7m Handheld Collector [PERP=0.8~1W]: 5m
IC Chip Type	ALIEN Higgs3; FM11RF08
Memory Capacity	96-bit EPC ; 512-bit user memory; 64-bit TID; 4-byte UID
Data Life	10years
Number of Use/Storage Life	100000times
Surface Material	PVC
Antenna Material/Base Material	PET
Package Form	The minimum unit is 200 sheets/box
General	
Working Environment	-20°C ~ 65°C / -4°F ~ 149°F
Dimensions	86 × 54 × 0.82 mm (3.39 × 2.13 × 0.0323 inch)
Weight	7.0 g/sheet
Storage Temperature and Humidity	-20°C ~ 65°C / -4°F ~ 149°F

▪ Available Model

DS-TRC902-1(dual-band)

▪ Dimension

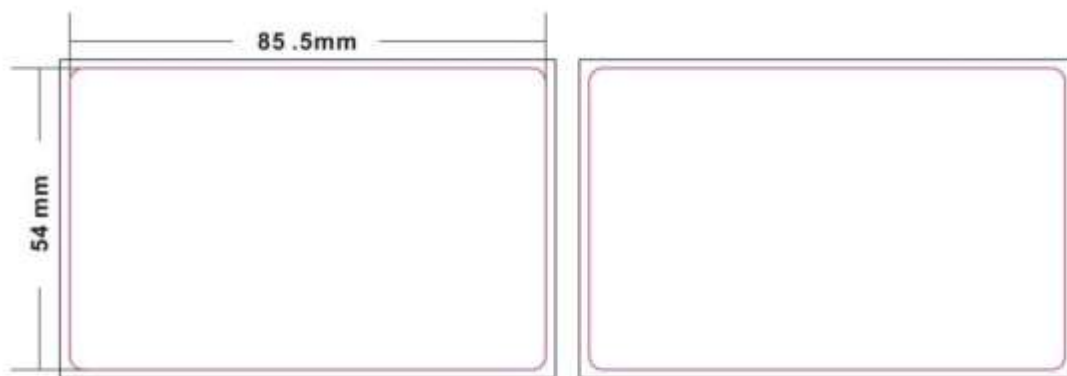

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq