

DS-TRD902-1/A
UHF Card Issuer

- Comply with EPC C1 GEN2/ISO18000-6C protocol standard
- Good anti-collision mechanism, can read multiple electronic tags at the same time
- Power supply and working status indication


▪ Specification

Interface	
USB	1*USB
UHF	
Working Frequency	Default 920.5MHz~924.5MHz
RF Protocol	EPC C1 GEN2/ISO18000-6C
Transmitting Power	10dBm
Antenna Type	Circularly polarized antenna (3dBi)
Reading Distance	≤30cm@Impinj H47, depending on the type of tag as well as the transmit power
FSA Function	None
Indicator	LED power indicator, LED status indicator and buzzer
General	
Power Supply	5VDC, USB power supply, maximum current 500mA
Working Environment	-10°C~55°C
Dimensions	120 × 78 × 29 mm (4.72 × 3.07 × 1.14 inch)
Protection	IP53
Weight	0.12 kg (0.0265 lb.)

▪ Available Model

DS-TRD902-1/A

▪ Dimension

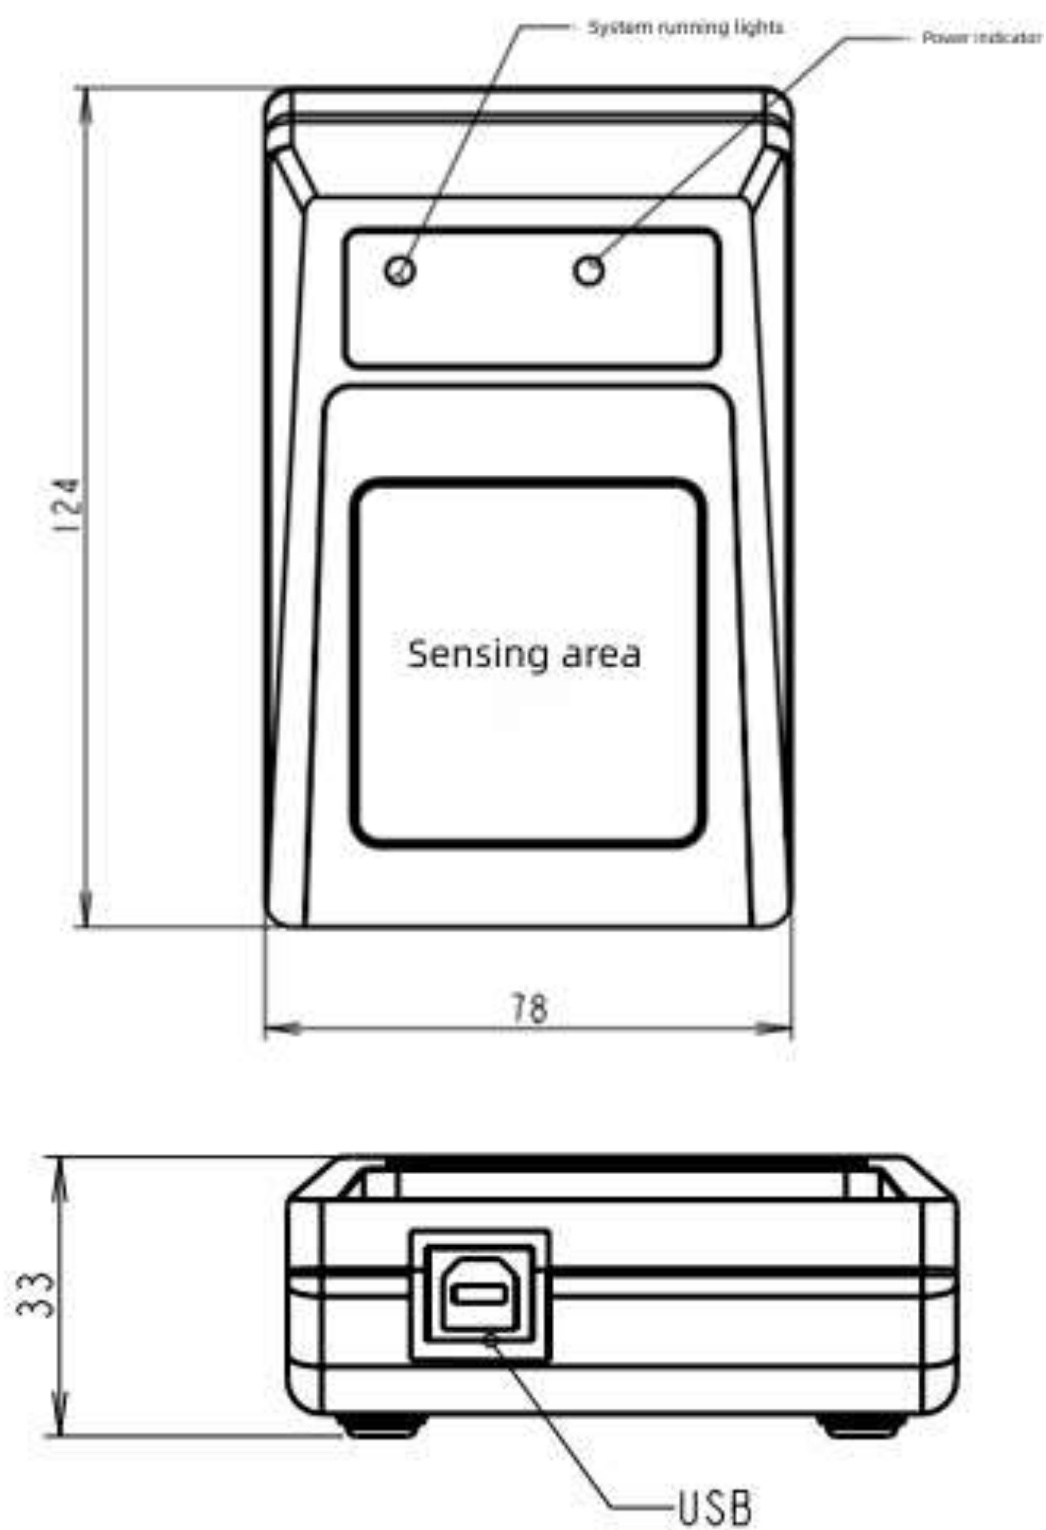



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq