

DS-TRI900-1/A UHF Card Reader

- Support EPC C1 Gen2/ISO 18000-6C
- Support EPC intensive read mode
- Long distance reading, RF output power up to 33dBm
- Support 640Kbps tag data reading rate
- Support Ethernet, Wiegand communication
- Flexible configuration and parameterization to maximize label reading and optimal performance



▪ Specification

Interface	
Wiegand	Wiegand 34/26
Network Interface	1*10/100M Base-T (RJ-45)
UHF	
Working Frequency	840~960MHZ (Optional)
RF Protocol	EPC C1 Gen2/ISO18000-6C
Transmitting Power	+10~ +33dBm (Optional)
Modulation Mode	FHSS or fixed frequency (optional)
Antenna Type	9dBi circularly polarized antenna
Reading Distance	Stable reading 0~9 meters
Reading Rate	200 times/sec
General	
Power Supply	DC 24V rated input voltage
Working Environment	-40°C~70°C
Dimensions	260 × 260 × 35 mm (10.24 × 10.24 × 1.38 inch)
Protection	IP65
Installation Mode	Universal wall-mounted bracket pole mounting fixture
Storage Temperature and Humidity	-40°C~85°C

▪ Available Model

DS-TRI900-1/A

▪ Dimension

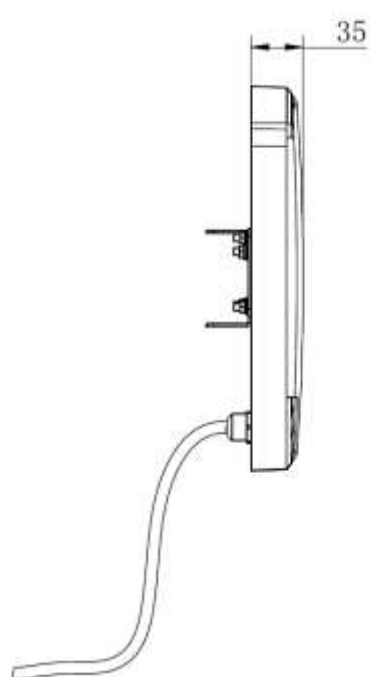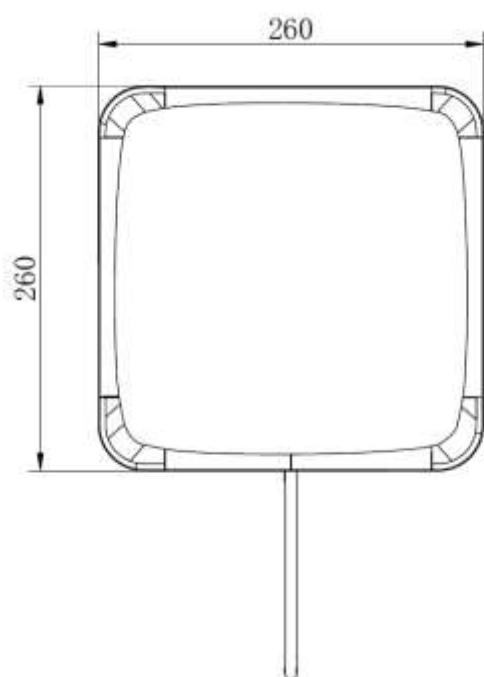

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq