

HF-VS409**Visual Smoke Detection Camera**

- Smoke detection, temperature detection, VaaS (Intruder Verification as a Service) approved
- High sensitivity, safe, reliable and handy
- 4 million HD resolution, wide angle lens
- Maximum resolution: 4 megapixels (2560 × 1440@25 fps), real-time image output
- Configurable intelligent video analysis to facilitate fire source detection and fire hazards verification
- Real-time video prompts, showing alarm information, real-time alarm prompts to mobile APP
- Upload alarm events and device status information
- External 12 VDC power supply, battery power supply in the event of power failure to ensure normal operation of the alarm
- Built-in buzzer, high decibel alarm
- 1-ch alarm input and 1-ch alarm output
- Remote silencing
- Link alarm images and videos when alarm is triggered
- Low bit rate, low latency, ROI enhanced coding, SVC adaptive coding technology, smart 265 coding
- IR lamp, long service life, irradiation distance up to 15 meters
- Automatic switch of ICR infrared filter to achieve 24/7 monitoring
- Day/Night mode settings
- microSD/SDHC/SDXC card (128 G) local storage
- 3D digital noise reduction, backlight compensation, automatic electronic shutter function, adapt to different monitoring environments

▪ Specification


Camera	
Resolution	2560 × 1440
Sensor	1/2.7" progressive scan CMOS
lowest luminance	0.015 Lux @ (F2.25, AGC ON), 0 Lux with IR
Lens	1.05 mm, F2.2 Horizontal: 170°, Vertical: 160°
Image settings	Brightness, contrast, saturation
Wide Dynamic Range	120 dB
Shutter	1/25 s to 1/100,000 s
Day & Night	ICR infrared filter
Image enhance	Backlight compensation, high light inhibition, 3D digital noise reduction
Encoding Type	Main Profile
Video compression rate	32 Kbps to 8 Mbps
Video compression standard	H.264, H.265
Smart alarm	Fire source recognition, indoor emergency exits blocking, intrusion detection, cross-border detection
Frame rate	50 Hz: 25 fps (2560 × 1440, 1920 × 1080, 1280 × 720)
Interface protocol	ONVIF(PROFILE S,PROFILE G),ISAPI
General function	Heartbeat, mirror, password protection,watermarking technology, IP address filtering
Storage	microSD/microSDHC/microSDXC card (128 GB) Local storage and transmission when disconnected from the network NAS (NFS, SMB/CIFS) SD card encryption and SD card status detection with Hikvision Card
Power consumption	≤ 6 W
IR range	15 m (49 ft.)
Detector	
High temperature alarm	Yes
Temperature threshold	54 °C to 70 °C (129°F to 158°F)
Function	
Tampering alarm	Yes
Mute	Yes
Maze dirty alarm	Yes
Low voltage alarm	Yes
Self-check	Yes
Remote muffler	Yes
Interface	
Alarm	1-ch audio input (Line in), 1-ch audio output (Line Out)
Communication Interface	1 RJ45 Self-adaptive 10 M/100 M Ethernet Interface (Support PoE)
General	
Standby current	Smoke detector: < 9 μA Camera: < 350 mA
Executive standard	Q/HKD 007-2019
Working principle	Photoelectric

Alarm sound level	≥85 dB@3 m (A-weighting)
Power supply	Main power: 220 VAC to 12 V; PoE: 802.3af, Class 2 Alternate power: 3 VDC
Operation temperature	-10 °C to 55 °C (14 °F to 131 °F)
Operation humidity	≤95% no condensing
Weight	With packaging: 900 g Without packing: 475 g
Dimension (W×H×D)	With packaging: 184 mm × 184 mm × 214 mm Without packing: ϕ 120 mm × H 72 mm(ϕ 4.72" × 2.87")
Alarm current	Smoke detection: < 40 mA

▪ Available Model

HF-VS409

▪ Dimension

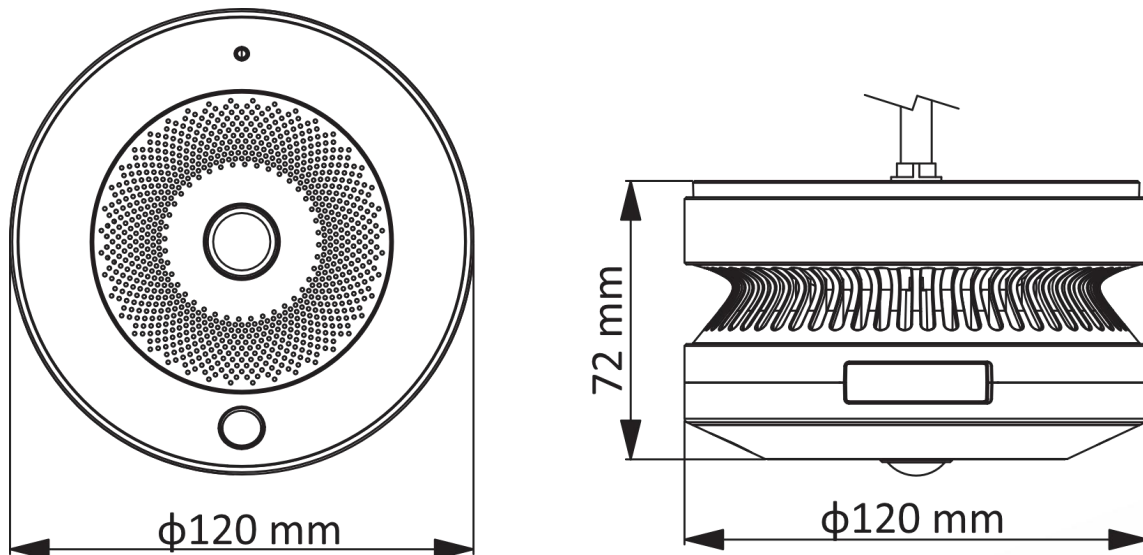

See Far, Go Further



www.hikvision.com
support@hikvision.com

