



Overview

- 4 Megapixel IR
- True WDR 120dB
- 2.8mm Fixed Lens
- H.265, H.264, MJPEG
- Support 9:16 Corridor Mode
- IP67
- Built-in Mic & Speaker








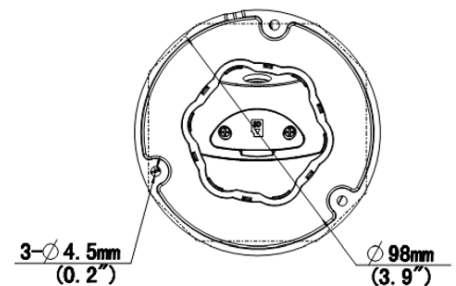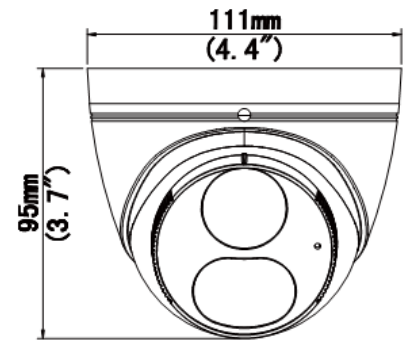

Technical Specifications

Device	
Image Sensor:	1/3", 4.0 Megapixel, Progressive Scan CMOS
Min Illumination:	Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Shutter Time:	Auto/Manual, 1 ~ 1/100000s
Lens:	2.8mm @1.6, Fixed-focal
WDR:	120dB
Angle of View:	H:112.9°, V: 59.1°, O: 121.2°
Angle Adjustment:	Pan: 0° ~ 360° Tilt: 0° ~ 80° Rotate: 0° ~ 360°
3-Axis Adjustment:	Yes
Day & Night:	IR-Cut Filter with Auto Switch (ICR)
IR Range:	Up to 30m (98ft) IR range
Compression Standard	
Video Compression:	H.265, H.264, MJPEG
Video Bit Rate:	128 Kbps~16 Mbps
Two-Stream:	Yes
Analytics:	Crossline & Intrusion (based on Human Body Detection), Motion Detection, Tampering Alarm, Audio Detection
Image	
Max. Image Resolution:	2688 x 1520
Frame Rate:	25fps (2688 x 1520)
ROI Codec:	Up to 8 areas
Image Setting:	White Balance, Digital Noise Reduction, Smart IR, Flip, HLC, BLC



Technical Specifications

Network	
Alarm Channels:	–
Protocols:	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, 802.1x, SNMP
Interface	
Communication Interface:	1 RJ45 10M/100M Base-TX Ethernet
Local Storage:	Micro SD, up to 256GB
Audio:	Built-in Mic
General	
Safety	CE: EN 62368-1 UL: UL 62368-1
EMC	FCC: FCC Part 15 CE-EMC: EN 55032/ EN 55035/ EN IEC 61000-3-2/ EN 61000-3-3
Operating Conditions:	Temperature: -30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (Non-Condensing)
Power Consumption:	Max 8.0W
Power Supply:	DC 12V±25%, PoE (IEEE 802.3af)
Weather Proof Rating:	IP67
Vandal Resistant:	–
Dimensions:	Φ111 x 95mm (Ø4.4" x 3.7")
Weight:	0.54kg
Software:	No license required for use with Video Insight Software
Optional Accessories	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p>M-WM-JB-MINI</p>  </div> <div style="text-align: center;"> <p>M-WM-MINI</p>  </div> <div style="text-align: center;"> <p>M-PM</p>  </div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-start; margin-top: 10px;"> <div style="text-align: center;"> <p>M-Pendant-Ex</p>  </div> <div style="text-align: center;"> <p>M-Pendant</p>  </div> <div style="text-align: center;"> <p>M-JB-T</p>  </div> </div> <div style="text-align: center; margin-top: 10px;"> <p>M-NPT34</p>  </div>