Ruíjie | Reyce

RG-EW300T N300 Wireless 4G LTE Router

DATASHEET



Highlights

- Cloud-managed
- Plug and Play
- 4 External Antennas
- Up to 150Mbps Download Speed
- Three-year Warranty

Highlight Features

SALAN SCIENCES

RG-EW300T, Always Stay Connected

Cloud-managed 300 Mbps Wireless 4G LTE Router

Enjoy the Internet Wherever You Are

Leveraging the cutting-edge LTE technology, the RG-EW300T delivers cable-free internet connectivity. With a simple SIM card and data plan, this router seamlessly connects to nearby mobile signal towers for instant internet access.



No Configuration Needed, Plug and Play

Once you insert the SIM card and turn on the router, you're all set to surf the speedy 4G LTE network.



High-Quality Hardware for Smooth Experience

Seamless Connectivity

Highly Adaptable

The router is equipped with 4 external antennas to ensure a more stable signal and broader coverage. Along with the 4G LTE modem, it is compatible with most service providers and can provide download speeds of up to 150Mbps.



Seamless Connectivity



3×10/100Mbps LAN Ports and 1×10/100Mbps LAN/WAN Port meet your wired terminal access needs. The fully functional LAN/WAN port allows you to use the RG-EW300T as a regular router, which is compatible with cable, fiber, and DSL modems.


Experience Internet Freedom

The Ruijie Reyee APP provides incredible advanced features, allowing you to remotely manage your network at any time.





RG-EW300T, Stay Connected Everywhere The 4G LTE router RG-EW300T offers convenient, reliable, and seamless networking, catering to diverse scenarios.

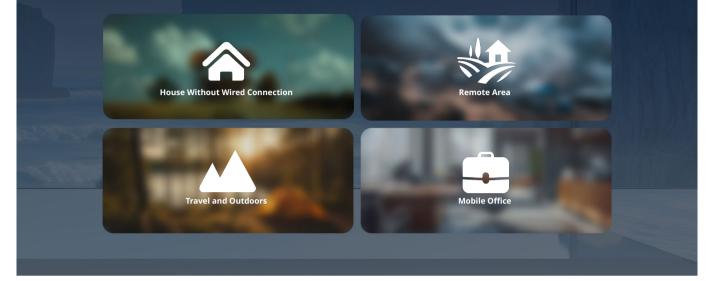

· · · · · · · · · · · · · · · · · · ·
· · · · · · · · · · · · · · · · · · ·
* * * * * * * * * * * * * * * * * * * *

Specifications

Basic	
Dimensions (W×D×H)	175mm×100mm×25mm (6.89 in. ×4.72 in. ×1.06 in. antennas not included)
Weight	0.25kg (packages not included)
Wi-Fi Standards	Wi-Fi 4 (IEEE 802.11n)
MIMO	2.4 GHz, 2×2, MIMO
Max. Wi-Fi Speed	2.4 GHz: 300 Mbps
4G Cartgory	LTE CAT.4
Max. 4G speed	Downlink: 150Mbps Uplink: 50Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz
Antennas	2 Detachable External 4G LTE Antennas 2 Fixed External Wi-Fi Antennas
Antennas Type	External Omnidirectional
Antennas Gain	2.4 GHz: 4dBi 4G LTE: 3dBi
Port	1×10/100Base-T WAN/LAN 3×10/100Base-T LAN
Card Slot	1× Micro SIM Card Slot
Recommended Users	8
Max. Users	32
Power Supply	DC 12V/1.0A
Power Consumption	< 12 W
Wi-Fi Operation Frequency Bands	802.11b/g/n: 2.400 GHz to 2.483 GHz country-specific restrictions apply
Network Type	WCDMA B1/B5/B8 (2100/850/900 MHz) FDD-LTE B1/B3/B5/B7/B8/B20/B28 (2100/1800/850/2600/900/800/700 MHz) TDD-LTE B38/B40/B41 (2600/2300/2500 MHz)



Basic 2.4GHz Wi-Fi: 2400~2483.5MHz \leq 20dBm(EIRP) WCDMA $B1/B5/B8 \le 24dBm$ **Transmit Power** FDD-LTE B1/B3/B5/B7/B8/B20/B28 23dBm TDD-LTE B38/B40/B41<23dBm 2.4GHz Wi-Fi:20MHz 802.11b: -79 dBm(1 Mbps), 802.11g: -81dBm(6 Mbps), -64 dBm(54 Mbps) 802.11n: -81dBm(MCS0), -63 dBm(MCS7) WCDMA B1/B5: -109 dbm (primary set) WCDMA B8:-108.3 dbm (primary set) LTE-FDD B1: -97.3 dbm (primary set), -98.4 dbm (diversity), -100.2 dbm (primary set + diversity) LTE-FDD B3: –96.4 dbm (primary set), –96.4 dbm (diversity), –99.4 dbm (primary set + diversity) **Receive Sensitivity** LTE-FDD B5:-96.3 dbm (primary set),-99.1 dbm (diversity),-101.95 dbm (primary set + diversity) LTE-FDD B7:-96.06 dbm (primary set),-96.36 dbm (diversity),-97.6 dbm (primary set + diversity) LTE-FDD B8:-97.4 dbm (main set), -98.2 dbm (diversity), -102.05 dbm (main set + diversity) LTE-FDD B20: -96.2 dbm (primary set), -97.5 dbm (diversity), -100.75 dbm (primary set + diversity) LTE-FDD B28: –96.7 dbm (primary set), –97.9 dbm (diversity), –97.55 dbm (primary set + diversity) LTE-TDD B38:-98.26 dbm (primary set),-97 dbm (diversity),-99.3 dbm (primary set + diversity) **Operating Temperature** -10 °C to +40 °C (14 °F to 113 °F) **Operating Humidity** 5% to 95% RH (non-condensing) Certifications CE, RoHS **Wireless OFDMA MU-MIMO BSS** Coloring

3

Maximum Number of SSIDs

Specifications

Wireless	
SSID Hiding	\checkmark
Band Steering	-
Guest Wi-Fi	\checkmark
WPA/WPA2	\checkmark
WPA3	\checkmark
Roaming	Layer 2 Roaming
Blocklist	\checkmark
Reyee Mesh	-
Mesh Pairing by Hardware	-
Mesh Pairing by Mesh Button	-
Mesh Pairing by Eweb	-
Recommended Hop Count	-
Wi-Fi Optimization	\checkmark
QoS (WMM)	\checkmark
WPS	-
Transmission Power Adjustment	\checkmark
Hardware	

Hardware	
CPU	MT7628DAN
Flash	16 MB
RAM/SDRAM	64 MB
Color	Black
System LED Indicator	\checkmark
Reyee Mesh LED Indicator	NA
Reyee Mesh Button	NA
Power Button	NA



	Features
Reset Button	\checkmark
DC Connector Dimensions	Outer Diameter: 5.5 mm Inner Diameter: 2.1 mm Length: 9 mm (Outer Diameter: 0.22 in. Inner Diameter: 0.08 in. Length: 0.35 in.)
	WAN
3G/4G Router	\checkmark
Static IP	\checkmark
DHCP	\checkmark
PPPoE	\checkmark
Learning PPPoE Account & Password	\checkmark
VLAN Tagging	\checkmark
	LAN
DHCP Server	\checkmark
Client List	\checkmark
Static IP Assignment	\checkmark
Port-Based Flow Control	\checkmark
	Features
TR069	\checkmark
ΙΡν6	\checkmark
DDNS	\checkmark
IPTV	\checkmark
Alarm	Not supported in 4G mode, supported in router mode
Diagnosis	\checkmark
UPnP	\checkmark
ARP Binding	\checkmark



	Features
Port Mapping	~
DMZ Host	\checkmark
Rate Limitation of Terminals	\checkmark
Hardware Acceleration	-
MAC Address Cloning	\checkmark
Cloud Management	\checkmark
Repeater Mode	\checkmark
WISP Mode	\checkmark
Security	
PPTP VPN Server	-
PPTP VPN Client	-
L2TP VPN Client	-
Parental Control	Time Schedule
Protect TCP Flood Attacks	\checkmark
Protect ICMP Attacks	-
Protect UDP Flood Attacks	-
	System
Default Access/Password	192.168.110.1 Check the label on the bottom of the device for the default password.
URL Access	\checkmark
Local Upgrade	\checkmark
	\checkmark
Online Upgrade	•
Online Upgrade APP Upgrade	✓ ✓



System	
Factory Reset	\checkmark
Language	Chinese English Vietanmese Turkish Indonesian Thai traditioanl Chinese Spanish Russian Arabic Ukrainian Czech Italian

Package Contents

Package Information	RG-EW300T
Wireless Router	1
Power Adapter	1
Quick Start Guide	1
Warranty Card	1
Cat5E UTP Cable	1

Rujje Rcycc

Redefine your easy network

Copyright ©2000-2024 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd. Website: https://reyee.ruijie.com/en-global