

**iDS-7204HUHI-M2/XT****4-ch 5 MP 1U H.265 AcuSense DVR****Key Feature**

- 4 channels and 2 HDD 1U AcuSense DVR
- Support 2-ch Facial Recognition or 4-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Efficient H.265 pro+ compression technology
- Encoding ability up to 4K @ 8fps(1-ch); 3K/5MP @12fps
- Up to 8 channels IP camera inputs, each channel up to 8MP
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Support All channels Motion Detection technology
- Support HDTVI Two-Way Audio technology

**Compression and Recording**

- H.265 Pro+ can be enabled to improve encoding efficiency and reduce data storage costs
- Recording at up to 8 MP resolution

**Smart Function**

- Up to 8 channels (analog channel) Motion Detection 2.0
- Up to 8 channels (advanced model, analog channel) Perimeter Protection
- Up to 4 channels (advanced model, analog channel) human face recognition
- Support smart playback to enhance playback efficiency

**Network & Ethernet Access**

- Support Hik-Connect & DDNS (Dynamic Domain Name System)
- Output bandwidth limit configurable


## ▪ Specification

Facial Recognition	
Face Picture Library	Up to 16 face picture libraries
Face Picture Comparison	2-ch face picture comparison alarm (HD analog camera)
Perimeter Protection	
Human/Vehicle Analysis	Up to 4-ch
Facial Detection	
Facial Detection and Capture	Face picture comparison, face picture search
Video and Audio	
IP Video Input	4-ch (up to 8-ch), each up to 8 MP
Analog Video Input	4-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDMI Output	1-ch, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz HDMI/VGA simultaneous output
VGA Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz HDMI/VGA simultaneous output
CVBS Input	PAL/NTSC
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Synchronous playback	4-ch
HDTVI Input	8 MP(3840 × 2160)@12/15 fps, 3K(2960 × 1665)@25/20 fps,3K(3328×1504)@20fps,5 MP(2560 × 1944)@20 fps, 4 MP(2560 × 1440)@25/30 fps,1080P@25/30 fps, 720P@25/30fps
AHD Input	5 MP(2560 × 1944)@20 fps, 4 MP(2560 × 1440)@25/30 fps,1080P@25/30 fps, 720P@25/30fps
HDCVI Input	8 MP(3840 × 2160)@12/15 fps, 3K(2880×1620)@25/20fps, 5 MP(2592 × 1944)@20 fps, 4 MP(2560 × 1440)@25/30 fps,1080P@25/30 fps, 720P@25/30fps
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Audio Input	1-ch, RCA (2.0 Vp-p, 1 KΩ), 4-ch via coaxial cable
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input)

Recording	
Video Compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Encoding Resolution	8 MP/5 MP/3K/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF
Frame Rate	<p>Main stream:</p> <p>8 MP@8 fps/3K@12 fps/5 MP@12 fps/4 MP@15 fps/8 MP Lite@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N)</p> <p>*: 8 MP@8 fps is only available for channel 1, 8 MP Lite is only available for channel 2 to channel 4.</p> <p>Sub-stream:</p> <p>WD1/4CIF/CIF@25 fps (P)/30 fps (N)</p>
Video Bitrate	32 Kbps to 10 Mbps
Dual-stream	Support main stream or sub stream
Stream Type	Video, Video & Audio
Audio Compression	G.711u
Audio Bitrate	64 Kbps
Network	
Total Bandwidth	96 Mbps
Network Protocol	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
Remote Connection	32
Network Interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface
Auxiliary Interface	
SATA	2 SATA interface
Capacity	up to 10 TB capacity for each disk
Serial Interface	RS-485 (half-duplex)
USB Interface	<p>Front panel: 1 × USB 2.0;</p> <p>Rear panel: 1 × USB 2.0</p>
Alarm In/Out	N/A
General	
Power Supply	12 VDC, 2.3 A
Consumption	≤ 10 W
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Dimension (W × D × H)	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)
Weight	≤ 1.16 kg (2.6 lb)

**Note:**


- 1: Face picture comparison, motion detection 2.0 and perimeter protection cannot be enabled at the same time. Enable one function will make the other two unavailable.
- 2: Enhanced IP mode might be conflicted with smart events (face picture comparison, motion detection 2.0 and perimeter protection) or other functions, please refer to the user manual for details.
- 3: The number of audio inputs and alarm in/out can be optional. The tag on the package will describe audio input and alarm in/out parameters. For example, "4A+8/4ALM" means your device has 4 audio inputs, 8 alarm inputs and 4 alarm outputs. If your device only has 1 audio input, the tag may not describe it.

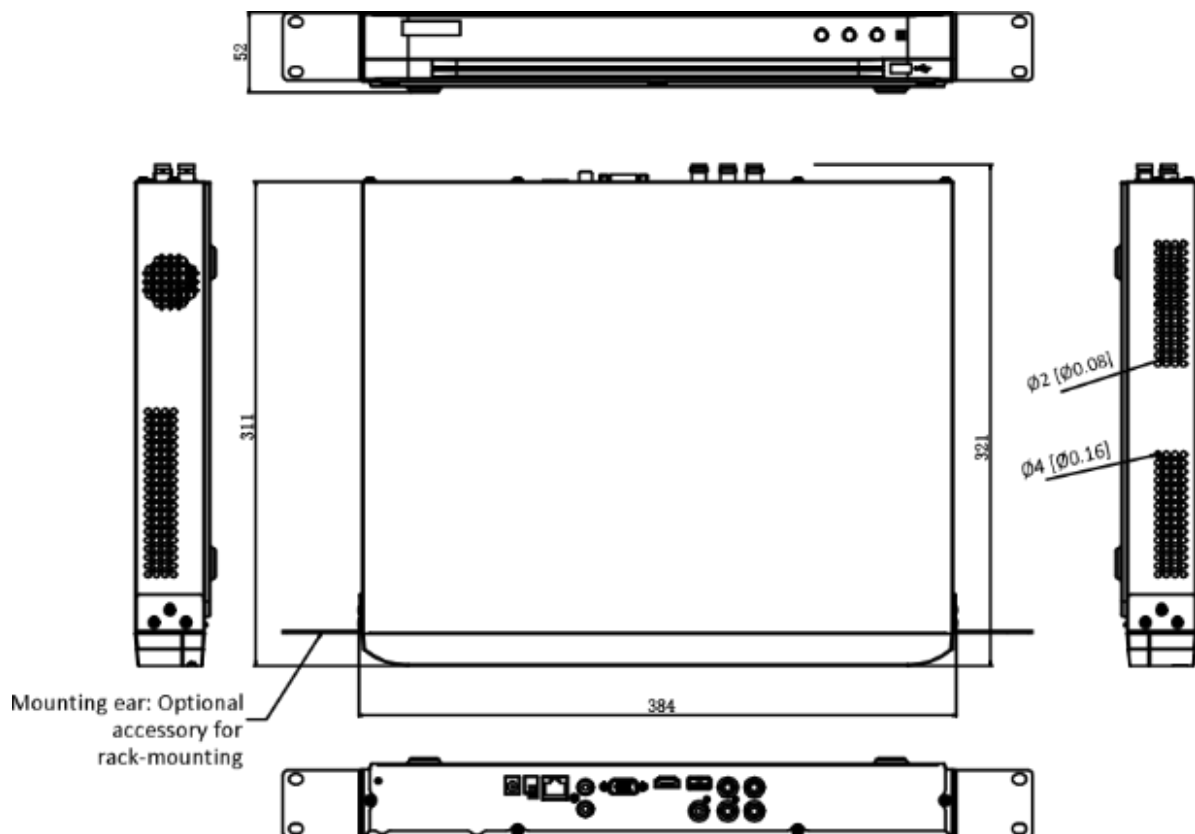**Dimension**


Unit:mm [inch]

SCALE 1:1

## Physical Interface

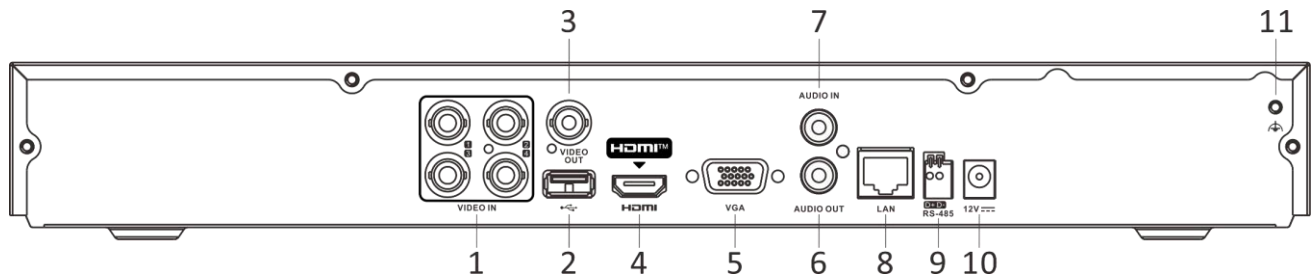

No.	Description	No.	Description
1	VIDEO IN	7	AUDIO IN, RCA connector
2	USB interface	8	LAN network interface
3	VIDEO OUT	9	RS-485 serial interface
4	HDMI interface	10	12 VDC power input
5	VGA interface	11	GND
6	AUDIO OUT, RCA connector		

## Available Model

iDS-7204HUHI-M2/XT

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

